

UNION ELBOW

P/N: MEU-501/502

DESCRIPTION

The union elbow is used to provide a 90° connection between the agent cylinder valve and the flexible hose 50A. It comes with two rubber packing seals that must be properly placed inside the union nuts during installation to ensure air-tight connection. The union elbow is fitted with 85 mm octagon nut on both ends for easy installation. When the union elbow is to be connected to a 40 mm discharge valve, a union elbow adapter is needed and must be obtained separately.



Union Elbow Set


TECHNICAL INFORMATION

Approval for use with EFS/PFSUL, FM
 Materials
 Elbow and Union Stainless Steel (STS304)
 Union Nut Brass (C3771)
 Packing Seal NBR
 Length, L
 MEU-501 125 mm (4.9 in)
 MEU-502 225 mm (8.8 in)
 Hydrostatically tested at 137.8 bar (2000 psi)

ORDERING INFORMATION

Specify part number and description when ordering.

Part/Model No.	Description
MEU-501	125 mm Union elbow
MEU-502	225 mm Union elbow
TBD	Rubber packing

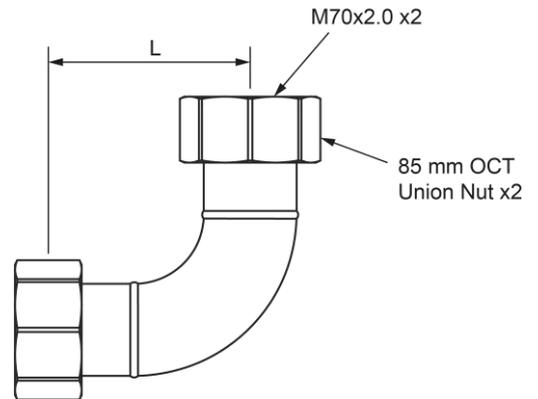

Actual product may differ from the images shown.